

Super Maxx[®] BIO

3.0 metres rigid
5-rows

Standard equipment: BIO

- Front gauge wheels 18.5 x 8.5-8
- Harrow with tines Ø12 mm
- Road lighting kit (LED)
- With hitch cat. 2



5-rows

Standard machine

Type BIO	Work. width	Transp. width	No. of tines	Note	Weight	Item no.	Price excl. VAT
Super Maxx [®] 30-5 BIO	2.85 m	3.00 m	22	2 gauge wheels headstock cat. 2	885 kg	4503 0300-2	

Options

Description	Note	Weight	Item no.	Price excl. VAT
2nd Harrow row	incl. console for Super Maxx [®] 30	125 kg	4502 0350-2	
Crumbler roller	attachment instead of a harrow for Super Maxx [®] 30	81 kg	4502 3030	

Retrofit kit on levelling bar 1st row + harrow 2nd row

Instead of the harrow supplied as standard, a levelling bar is used in the 1st row. The harrow supplied as standard is installed in the 2nd row with the also supplied consoles.

Retrofit kit levell. bar	levelling bar + console 2nd row for Super Maxx [®] 30	100 kg	4502 0371K	
2 Rear swiveling gauge wheels	swiveling gauge wheel 18,5 x 8,5-8 -2 pcs. for gap between tines	90 kg	4502 9070-1	
2 Rear swiveling gauge wheels reinforced	swiveling gauge wheel 195/55 R10 - 2 pcs. for gap between tines	110 kg	4502 9079-1	
Front gauge wheels reinforced	surcharge for heavy duty gauge wheels 195/55 R10 - 2 pcs., mounted ex factory	100 kg	4502 9074	

Options are added separately and have to be assembled on-site.


Hydraulic adjustment NEW

Description	Note	Weight	Item no.	Price excl. VAT
1st Hydraulic harrow row	surcharge for hydraulic tilt adjustment	30 kg	4500 5715	
2nd Hydraulic harrow row	surcharge for hydraulic tilt adjustment	31 kg	4500 5725	
Retrofit kit 1st hydraulic harrow	hydraulic tilt adjustmentg for 1st harrow row Super Maxx [®] 30 for self-assembly	30 kg	4500 5710	
Retrofit kit 2nd hydraulic harrow	hydraulic tilt adjustmentg for 2nd harrow row Super Maxx [®] 30 for self-assembly	32 kg	4500 5720	


Additional information

Additional information	Note
Final assembly Super Maxx [®] on-site:	approx. 1/2 hour Super Maxx [®] 30
Final assembly hydraulic harrow:	1st row approx. 1 hour, 2nd row approx 0.75 hour
Required hydraulic connections:	1x da for hydraulic harrow adjustment (optional)

5-rows

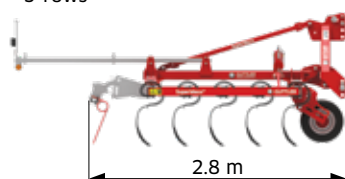

7-rows

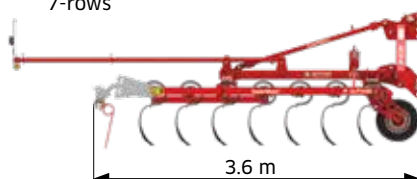

Cultivators