


GREENMASTER 750

7.5 metres hydraulic folding

For pasture maintenance, overseeding and seeding of new swards

Standard equipment:

- 2-rows NonStop-tines Ø12 mm, space between tines 75 mm
- Protection against loss of tines
- Hydraulic folding
- 4 Double gauge wheels with scrapers
- Headstock Cat. 2 and 3
- Road lighting kit (LED)
- **U-stands for storage out of season**

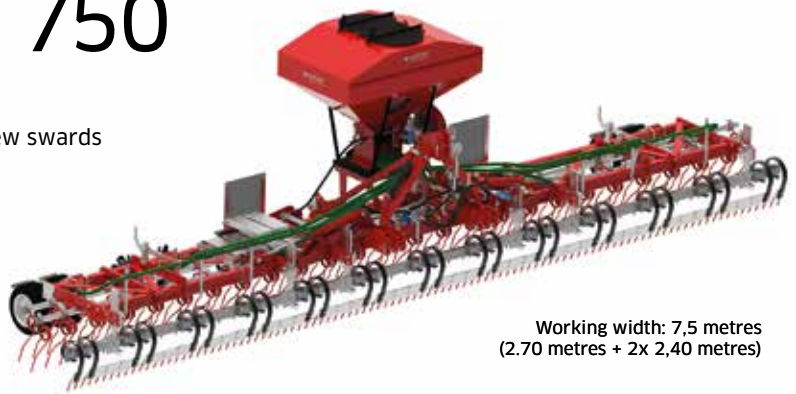

Working width: 7.5 metres
(2.70 metres + 2x 2,40 metres)

Standard machine

Type	Working width	Transport width	Transport height	Weight	Item Num.	Price excl. VAT
GreenMaster Harrow 600				780 kg	4600 0165	
Widening from 600 to 750*	7.50 m	3.00 m	3.85 m**	180 kg	4600 0176	

* for self-assembly ** Transport height with ground clearance of 0,25 metres

Options For Harrow

Type	Working width	Note	Weight	Item Num.	Price excl. VAT
Levelling bar 750	7.50 m	For levelling, for self-assembly	290 kg	4600 1087	
Ripperboard 750 QUATTRO	7.50 m	For remediation, for self-assembly	360 kg	4600 1850	
Coupling kit STANDARD		For trailed roller, mounted ex factory	15 kg	4600 1601	
Coupling kit STANDARD, retrofit kit		For trailed roller, for self-assembly	15 kg	4600 1603	
Coupling kit PREMIUM		For trailed roller, mounted ex factory	20 kg	4600 1602	
Coupling kit PREMIUM, retrofit kit		For trailed roller, for self-assembly	20 kg	4600 1604	
Connecting pipe for air brakes of the roller		For self-assembly	10 kg	7400 1011	

Further information regarding options for GreenMaster harrow, see page 31.

Pneumatic seeder

Type	Note	Weight	Item Num.	Price excl. VAT
410 litre 90° electric fan	Descript. see page 20, mounted ex factory	90 kg	8202 2040-1	
410 litre 90° hydraulic fan	Descript. see page 20, mounted ex factory	100 kg	8202 2043-1	
410 litre 90° mechanical fan	Descript. see page 20, w/o drive shaft, mounted ex factory	110 kg	8202 2036-1	
660 litre hydraulic fan	Descript. see page 20, mounted ex factory	130 kg	8202 2041-1	
660 litre mechanical fan	Descript. see page 20, w/o drive shaft, mounted ex factory	140 kg	8202 2037-1	
Console GreenMaster 600 for Pneumatic seeder 410 litre	For mounting the Pneumatic seeder 410 litre on the GreenMaster 750, mounted ex factory	40 kg	8202 2142	
Adapter plate for 660 litre	For mounting the Pneumatic seeder 660 litre on the console for the Pneumatic seeder 410 l, mounted ex factory	20 kg	7400 2141	

Options for Pneumatic seeder

Type	Note	Item Num.	Price excl. VAT
Area meter (ha)	Day- and total counter battery-powered, for self-assembly	7006 0601	
Electrical seed rate setting	Seed rate adjustable from the tractor cab, for self-assembly	8202 2072	
Hydraulic lifting for ground wheel	For GreenMaster 600 + 750 + 800 with ground wheel, for self-assembly Required hydraulic connection: 1x single acting	78432 9027	
Drive shaft 1010 mm	To drive the mechanical fan	8202 2149	

Further options for Pneumatic seeder see page 20.

Total GreenMaster 750

Examples	Weight	Price excl. VAT
GreenMaster harrow 750 + Levelling bar 700 + Pneumatic seeder 410 litre electric	1,380 kg	
GreenMaster harrow 750 + Levelling bar 700 + Pneumatic seeder 410 litre hydraulic	1,390 kg	
GreenMaster harrow 750 + Levelling bar 700 + Pneumatic seeder 660 litre mechanical	1,450 kg	
GreenMaster harrow 750 + Ripperboard 750 QUATTRO + Pneumatic seeder 410 litre electric	1,450 kg	
GreenMaster harrow 750 + Ripperboard 750 QUATTRO + Pneumatic seeder 410 litre hydraulic	1,460 kg	
GreenMaster harrow 750 + Ripperboard 750 QUATTRO + Pneumatic seeder 660 litre mechanical	1,520 kg	

Additional information

Additional information	Note
Assembly time for completion:	Mounting levelling bar or Ripperboard approx. 1.0 h. Widening of GreenMaster harrow from 600 to 750 approx. 1.5 h.