

Super Maxx[®] 90-5 | 90-7 BIO

9.0 metres
5-rows or 7-rows

Standard equipment:

- Six front swiveling gauge wheels 225/55 R12
- Hydraulic folding
- Harrow with tines Ø12 mm
- Road lighting kit (LED)



5- or 7-rows

Standard machine

Type BIO	Working width	Transport width	No. of tines	Note	Weight	Item no.	Price excl. VAT
Super Maxx [®] 90-5 BIO	8.85 m	3.00 m	68	incl. 6 gauge wheels headstock cat. 3/4	3,500 kg	4500 0900-1K	
Super Maxx [®] 90-7 BIO	8.95 m	3.00 m	69	incl. 6 gauge wheels headstock cat. 3/4	3,560 kg	4500 0907-1K	

Options


Description	Note	Weight	Item no.	Price excl. VAT
2nd harrow row	incl. console for Super Maxx [®] 90	350 kg	4502 9050K	
2 rear gauge wheels	for Super Maxx [®] 90-7 BIO for mounting between tines 195/55 R10		4502 9042K	
Auxiliary transport wheels	for Super Maxx [®] 90-5 BIO for Super Maxx [®] 90-7 BIO		4500 0940K 4500 0947K	
Transport tarpaulin for tines	tarpaulin for Super Maxx [®] 90-5 BIO tarpaulin for Super Maxx [®] 90-7 BIO	25 kg 25 kg	4500 1652 4500 1653	

Options are added separately and have to be assembled on-site!


Additional information

Final assembly Super Maxx [®] on-site:	approx. 2 hours Super Maxx [®] 90-5 BIO approx. 4 hours Super Maxx [®] 90-7 BIO
Required hydraulic connections:	2x da folding Super Maxx [®] 90-5 BIO and Super Maxx [®] 90-7 BIO

Cultivators

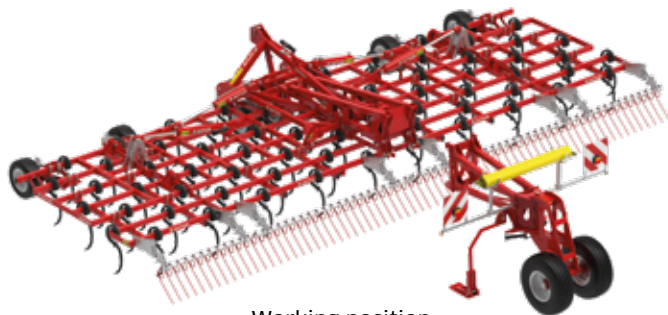

Working position

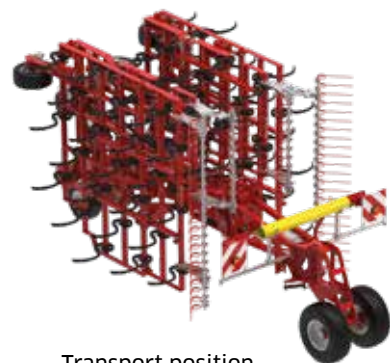

Transport position



Consider the traffic regulations! See page 5.