


# SUPER MAXX® 900-7 CULTI

**9 metres hydraulic folding with transport wheels**  
7-rows

## Standard equipment:

- Hydraulic folding
- Levelling bar
- Simplex Roller Ø56 cm Synthetic Ultra
- Harrow behind the roller
- Transport wheels with compressed air brake system
- Road lighting kit (LED)
- Tarpaulin for tines
- **Expert report for obtaining the general operating licence**

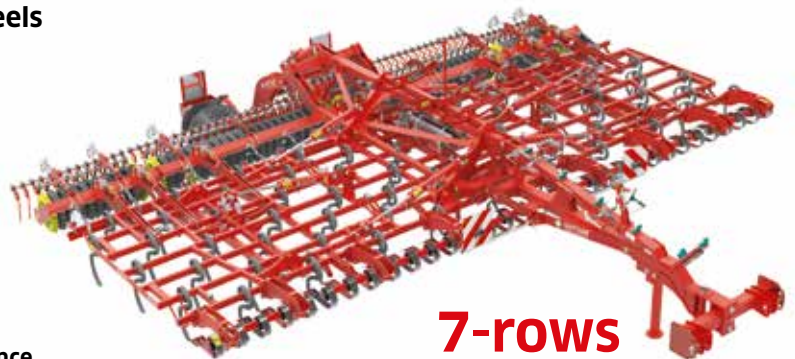

## Standard machine

Type	Working width	Transport width	Num. of tines	Support load	Axle load	Weight	Item Num.	Price excl. VAT
Super Maxx® 900-7-56	9.19 m	3.00 m	70	3,090 kg	5,470 kg	8,560 kg*	4500 1910K	

\* For total weights more than 3.000 kg consider the traffic regulations!

## Optional extras

Descriptor	Note	Weight	Item Num.	Price excl. VAT
FlatSpring for Super Maxx® 900-7	Hydraulic pitch control	650 kg	4500 1930K	
Hydraulic depth adjustment for the roller	1 additional da control unit necessary!		4500 1912K	
Loosening tines for Super Maxx® 900-7	4 tines mounted at the drawbar Quick-change system for points with swept point		5101 0051	

## Additional information

Additional information	Note
Total length:	10.8 m
Transport width:	3.0 m
Transport height :	4.0 m
Hydraulic connections required:	4x da (1x transport wheels, 1x folding, 1x FlatSpring, 1x depth adjustment of roller)
Final assembly of the Super Maxx® on-site:	approx. 2 hours (delivery on low-loader with excess width)



Loosening tines mounted at the drawbar.  
For Super Maxx® 900-7 CULTI, 1000-7 BIO and 1200-7 BIO.  
Item-No. 5101 0051