

DUPLEX® 56

1.5 to 4.0 metres rigid frame

(For sandy soil, from light to heavy soils)



Standard equipment:

- Front press with GÜTTLER® DUPLEX® roller in **special cast iron** Ø56 cm
- Headstock Cat. 2 for front linkage

Standard machine

Type	Working width	Transport width	Material	Prism rings	Weight	Item Num.	Price excl. VAT
DX 15-56	1.50 m	1.64 m	Special cast iron	14	550 kg	6164 6500	
DX 26-56	2.50 m	2.64 m	Special cast iron	24	830 kg	6173 3000	
DX 30-56	2.86 m	3.00 m	Special cast iron	28	1,050 kg	6174 1600	
DX 34-56	3.30 m	3.42 m	Special cast iron	32	1,200 kg	6175 1750	
DX 41-56	4.04 m	4.20 m	Special cast iron	39	1,300 kg	6175 1900	

Scrapers for Duplex® for heavy soils - retrofittable

Type	Item Num.	Rear scrapers		Front scrapers	
		Price excl. VAT	Item Num.	Price excl. VAT	Item Num.
ASX DX 15-56	6179 4510	330,-	6179 4520		
ASX DX 26-56	6179 5011	525,-	6179 5012		
ASX DX 30-56	6179 6013	560,-	6179 6014		
ASX DX 34-56	6179 6021	595,-	6179 6022		
ASX DX 41-56	6179 6025	765,-	6179 6026		

Tined unit Culti, space between tines 150 mm, 3 rows, c/w side plates and supporting swing arm

Type	Working width	Transport width	Note	Num. of tines	Weight	Item Num.	Price excl. VAT
For DX 26-56	2.50 m	2.50 m	rigid frame	15	340 kg	5014 4025	
For DX 30-56	3.00 m	3.00 m	rigid frame	17	380 kg	5014 4030	
			Levelling bar behind the tines, for self-assembly (see page 6)		130 kg	7400 4575	
For DX 34-56	3,50 m	3.50 m	rigid frame	21	420 kg	5014 4035	
For DX 41-56	4.00 m	4.00 m	rigid frame	25	460 kg	5014 4040	

FlatSpring hydraulically adjustable Attention: 1 additional da control unit necessary!

Type	Working width	Transport width	Note	Num. of tines	Weight	Item Num.	Price excl. VAT
For DX 30-56	3.00 m	3.00 m	hydraulically adjustable	9	380 kg	5014 3030	


Road lighting kit (LED)

Type	Note	Weight	Item Num.	Price excl. VAT
For front linkage (without tined unit)	Frame 140 x 140 mm, for self-assembly	15 kg	1127 3120-2	
For front linkage (with tined unit)	Frame 80 x 50 mm, for self-assembly	15 kg	1127 3100-2	
For front linkage (with FlatSpring)	Frame 140 x 140 mm, for self-assembly	25 kg	1127 3150	
For rear linkage	Frame 140 x 140 mm, for self-assembly	15 kg	1127 3210-2	


Optional extras

Descriptor	Note	Weight	Item Num.	Price excl. VAT
Headstock for rear linkage	for Duplex® with tined unit	153 kg	8030 8420	
Helpers for tined unit	Price per unit, mounted ex factory		4200 0290	
Helpers for tined unit	Price per unit as retrofit kit, for self-assembly		4200 0280	

Scraper for Duplex®

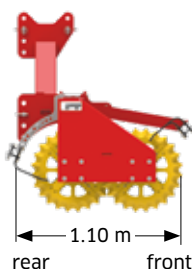

Tined unit: the headstock is designed for that the tined unit can be assembled and disassembled with only 3 pins

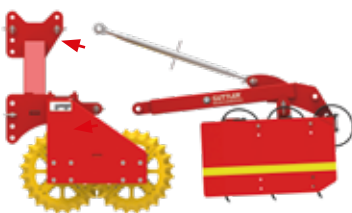

Tined unit is retrofittable at any time

Headstock for rear linkage

