

Mediana

4.2 to 9.0 metres with full frame pendular movement

For arable and grassland

Standard equipment:

- Self-cleaning prisma roller® Ø33/38 cm cast iron
- End scrapers as required
- Beet and maize sowing
- Pendular frames with **3D ground contouring**



For front- and rear linkage with special headstock

Type	Working width	Transport width	Note	Weight	Item Num.	Price excl. VAT
Mediana 400 front + rear	4.20 m	3.00 m	manual pivoting into transport pos.	1,010 kg	6034 0050	
Mediana 450 front + rear	4.50 m	3.00 m	manual pivoting into transport pos.	1,360 kg	6034 7050	
Mediana 500 front + rear	5.00 m	3.00 m	manual pivoting into transport pos.	1,470 kg	6035 0050	
Mediana 560 front + rear	5.60 m	2.80 m	manual pivoting into transport pos.	1,530 kg	6035 5050	
Mediana 600 front + rear	6.00 m	3.00 m	manual pivoting into transport pos.	1,680 kg	6036 0050	

For front linkage with hydraulic folding

Type	Working width	Transport width	Note	Weight	Item Num.	Price excl. VAT
Mediana 820 Front	8.14 m	2.82 m	18 rows at 45 cm	2,610 kg	6036 0820	
Mediana 900 Front	8.67 m	3.00 m	18 rows at 50 cm	2,740 kg	6036 0900	


Road lighting kit (LED)

Type	Working width	Transport width	Note	Weight	Item Num.	Price excl. VAT
For front linkage	mounted ex factory		400 450 500 560 600	15 kg	1127 3140-2	
For rear linkage	mounted ex factory		400 450 500 560 600	15 kg	1127 3230-2	
For front linkage	mounted ex factory		820 900	25 kg	1127 3145	


Optional extras

Descriptor	Note	Weight	Item Num.	Price excl. VAT
Enlarging VPW 400	Widening by 2x 0.60 m	280 kg	6034 3000	
Enlarging VPW 450	Widening by 2x 0.75 m	370 kg	6034 3500	
Enlarging VPW 500	Widening by 2x 1.00 m	420 kg	6035 3000	
Enlarging VPW 600	Widening by 2x 1.50 m	600 kg	6036 3000	
Hydr. pivoting into transp. pos.	da, mounted ex factory for Mediana 400 / 450 / 500 / 600	80 kg	8501 1000	
Hydr. pivoting into transp. pos.	da, mounted ex factory for Mediana 560	80 kg	8501 1001	

Mediana 400 + 450 + 500 + 560 + 600

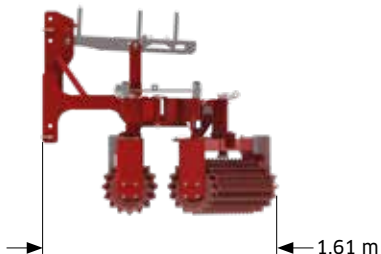

Mediana 820 + 900

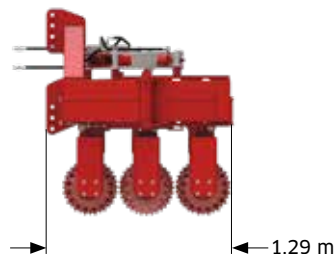

Consider the traffic regulations!
Restricted visibility must be observed, see page 5