

HARROFLEX 250 + 300




2.5 or 3.0 metres rigid frame
For aerating and harrowing

Consider the traffic regulations!
See page 5.

Standard equipment:

- 2 rows of NonStop tines 12 mm,
- Space between tines 75 mm
- Protection against loss of tines
- Headstock Cat. 2
- U-stand

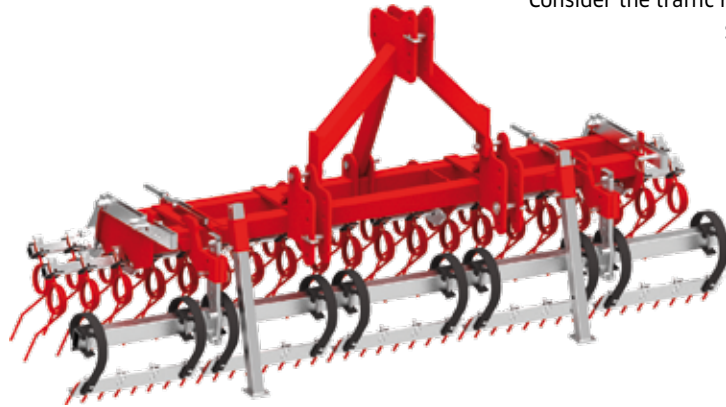

HarroFlex

Type	Working width	Transport width	Note	Weight	Item Num.	Price excl. VAT
HarroFlex 250	2.50 m	2.55 m	12 mm tines, space betw. tines 75 mm	330 kg	4600 0090-2	
Levelling bar 250	2.50 m	2.55 m	For levelling of molehills self-assembly	95 kg	4600 1070-2	
Ripperboard 250 UNO	2.50 m	2.55 m	Reseeding of grassland self-assembly	130 kg	4600 1810-1	
Ripperboard 250 QUATTRO	2.50 m	2.55 m	Reseeding of grassland self-assembly	120 kg	4600 1810-2	
Coupling frame	For coupling the Prisma roller® or for front linkage			50 kg	4600 1500-1	

Subtotal

Examples	Note	Weight	Item Num.	Price excl. VAT
Subtotal HarroFlex 250	With levelling bar 250 and coupling frame	475 kg		
Subtotal HarroFlex 250	With Ripperboard 250 QUATTRO and coupling frame	500 kg		

HarroFlex harrow

Type	Working width	Transport width	Note	Weight	Item Num.	Price excl. VAT
HarroFlex 300	3.00 m	3.00 m	12 mm tines, space betw. tines 75 mm	360 kg	4600 0100-2	
Levelling bar 300	3.00 m	3.00 m	For levelling of molehills self-assembly	110 kg	4600 1080-2	
Ripperboard 300 UNO	3.00 m	3.00 m	Reseeding of grassland self-assembly	130 kg	4600 1800-1	
Ripperboard 300 QUATTRO	3.00 m	3.00 m	Reseeding of grassland self-assembly	140 kg	4600 1800-2	
Coupling frame	For coupling the Prisma roller® or for front linkage			50 kg	4600 1500-1	

Subtotal

Examples	Note	Weight	Item Num.	Price excl. VAT
Subtotal HarroFlex 300	With levelling bar 300 and coupling frame	520 kg		
Subtotal HarroFlex 300	With Ripperboard 300 QUATTRO and coupling frame	550 kg		

Additional equipment for Green Master 250/300 Alpin (harrow in front - roller in rear)

For using the harrow in front are coupling frames + front linkage parts + self steering gauge wheels necessary!

Type	Note	Weight	Item Num.	Price excl. VAT
Front linkage parts	Self steering wheels and coupling frames necessary	30 kg	4600 1678	
Self steering gauge wheels	For front linkage (1 pair)	30 kg	4600 1620-2	
Coupling frame	For coupling the Prisma roller® or for front linkage		see above	

Road lighting kit (LED)

Type	Note	Weight	Item Num.	Price excl. VAT
Road lighting kit (LED)	For front linkage	10 kg	1127 3130-1	

Additional information

Additional information	Note
Final assembly Ripperboard and levelling bar	Approx. 0.5 hour