

AVANT 45 with tined unit

2.5 to 3.0 metres, rigid frame
(for medium to heavy, loamy soils)

Standard equipment:

- Front press with Güttler Simplex Roller® in special cast iron Ø45 cm
- Scraper rear at the Simplex Prisma Roller®
- Headstock Cat. 2 for front linkage
- Tined unit - space between tines 15 cm, 3-rows
- Side plates for the tined unit



Standard machine

Type	Working width	Transport width	Roller	Num. of tines	Prism rings	Weight	Item Num.	Price excl. VAT
Avant 26-45 with t.u	2.50 m	2.60 m	SX 26-45 SG	15	21	945 kg	4200 4125	
Avant 30-45 with t.u	2.92 m	3.00 m	SX 30-45 SG	17	24	1,015 kg	4200 4130	
	Levelling bar behind the tines, for self-assembly					130 kg	7400 4575	

Road lighting kit (LED)

Type	Note	Weight	Item Num.	Price excl. VAT
For front linkage	Frame 80 x 50 mm, for self-assembly	15 kg	1127 3100-2	
For rear linkage	Frame 140 x 80 mm, for self-assembly	15 kg	1127 3200-2	

Optional extras



Descriptor	Note	Weight	Weight Num.	Price excl. VAT
Headstock	for rear linkage	153 kg	8030 8400	
Helpers for tined unit	Price per piece, mounted ex factory		4200 0290	
Helpers for tined unit	Price per piece as retrofit kit, for self-assembly		4200 0280	

Solo Simplex 45 Prisma Rollers® with three-point headstock can be found on page 57.

Length for Avant 45 and Avant 56

Front press **without** headstock for rear linkage

Front press **with** headstock for rear linkage

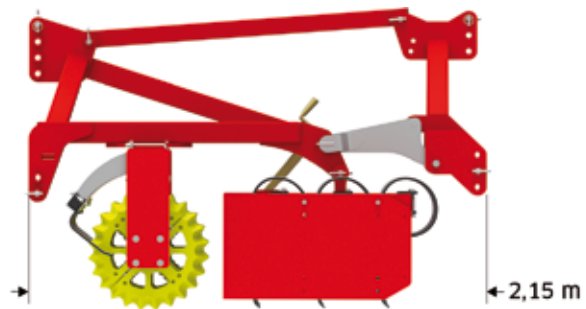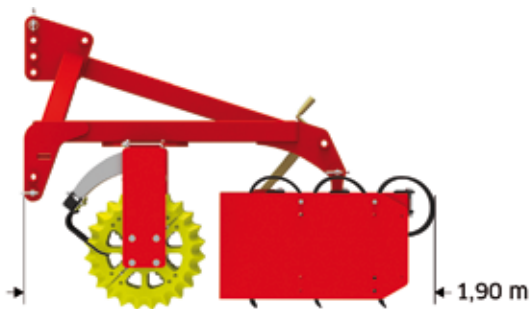

Avant 30-56 with tined unit and additional levelling bar between tines and roller



Consider the traffic regulations! Restricted visibility must be observed. Equipment list for front devices see page 5.