


GreenMaster 750

7.5 metres hydraulic folding

For pasture maintenance, overseeding and seeding of new swards

Standard equipment:

- 2-rows NonStop-tines Ø12 mm, space between tines 75 mm
- Protection against loss of tines
- Hydraulic folding
- 4 Double gauge wheels with scrapers
- Headstock Cat. 2 and 3
- Road lighting kit (LED)
- Coupling kit STANDARD for trailed roller
- **U-stands for storage out of season**

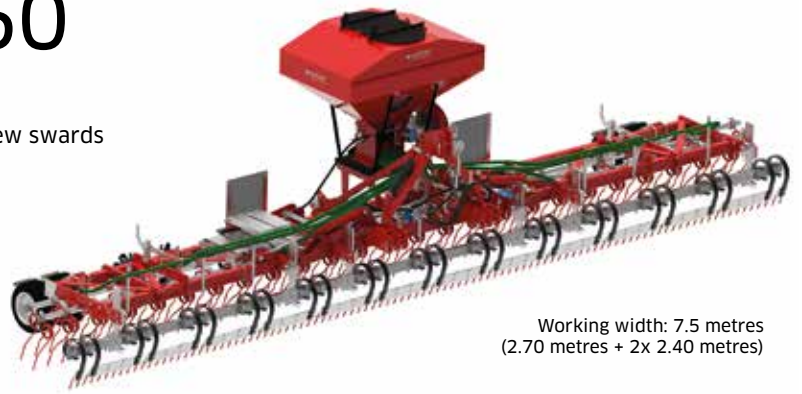

Working width: 7.5 metres
(2.70 metres + 2x 2.40 metres)

Standard machine

| Type | Working width | Transport width | Transport height | Weight | Item Num. | Price excl. VAT |
|------------------------|---------------|-----------------|------------------|----------|-----------|-----------------|
| GreenMaster Harrow 750 | 7.50 m | 3.00 m | 3.85 m** | 1,140 kg | 4600 0180 | |

* for self-assembly ** Transport height with ground clearance of 0.25 metres

Options For Harrow

| Type | Working width | Note | Weight | Item Num. | Price excl. VAT |
|--|---------------|---|--------|-----------|-----------------|
| Levelling bar 750 | 7.50 m | For levelling, for self-assembly | 290 kg | 4600 1087 | |
| Ripperboard 750 QUATTRO | 7.50 m | For remediation, for self-assembly | 360 kg | 4600 1850 | |
| Coupling kit PREMIUM | | For trailed roller, mounted ex factory | 20 kg | 4600 1602 | |
| Coupling kit PREMIUM, retrofit kit | | For trailed roller, for self-assembly | 20 kg | 4600 1604 | |
| Connecting pipe for air brakes of the roller | | For self-assembly | 10 kg | 7400 1011 | |

Pneumatic seeder

| Type | Note | Weight | Item Num. | Price excl. VAT |
|---|--|--------|-------------|-----------------|
| 410 litres 90° electric fan | Descript. see page 20, mounted ex factory | 90 kg | 8202 2040-1 | |
| 410 litres 90° hydraulic fan | Descript. see page 20, mounted ex factory | 100 kg | 8202 2043-1 | |
| 410 litres 90° mechanical fan | Descript. see page 20, w/o drive shaft, mounted ex factory | 110 kg | 8202 2036-1 | |
| 660 litres hydraulic fan | Descript. see page 20, mounted ex factory | 130 kg | 8202 2041-1 | |
| 660 litres mechanical fan | Descript. see page 20, w/o drive shaft, mounted ex factory | 140 kg | 8202 2037-1 | |
| Console GreenMaster 750 for Pneumatic seeder 410 litres | For mounting the Pneumatic seeder 410 litres on the GreenMaster 750, mounted ex factory | 105 kg | 8202 2142 | |
| Adapter plate for 660 litres | For mounting the Pneumatic seeder 660 litres on the console for the Pneumatic seeder 410 litres, mounted ex factory | 10 kg | 7400 2141 | |

Options for Pneumatic seeder

Further options for Pneumatic seeder see pages 20-21.

| Type | Note | Item Num. | Price excl. VAT |
|------------------------------------|---|------------|-----------------|
| Area meter (ha) | Day- and total counter battery-powered, for self-assembly | 7006 0601 | |
| Electrical seed rate setting | Seed rate adjustable from the tractor cab, for self-assembly | 8202 2072 | |
| Hydraulic lifting for ground wheel | For GreenMaster 600 + 750 + 800 with ground wheel, for self-assembly Required hydraulic connection: 1x single acting | 78432 9027 | |
| Drive shaft 1010 mm | To drive the mechanical fan | 8202 2149 | |

Total GreenMaster 750

| Examples | Weight | Price excl. VAT |
|---|----------|-----------------|
| GreenMaster Harrow 750 + Levelling bar 700 + Pneumatic seeder 410 litres electrical | 1,650 kg | |
| GreenMaster Harrow 750 + Levelling bar 700 + Pneumatic seeder 410 litres hydraulic | 1,660 kg | |
| GreenMaster Harrow 750 + Levelling bar 700 + Pneumatic seeder 410 litres mechanical | 1,670 kg | |
| GreenMaster Harrow 750 + Levelling bar 700 + Pneumatic seeder 660 litres hydraulic | 1,690 kg | |
| GreenMaster Harrow 750 + Ripperboard 750 QUATTRO + Pneumatic seeder 410 litres electrical | 1,720 kg | |
| GreenMaster Harrow 750 + Ripperboard 750 QUATTRO + Pneumatic seeder 410 litres hydraulic | 1,730 kg | |
| GreenMaster Harrow 750 + Ripperboard 750 QUATTRO + Pneumatic seeder 410 litres mechanical | 1,740 kg | |
| GreenMaster Harrow 750 + Ripperboard 750 QUATTRO + Pneumatic seeder 660 litres hydraulic | 1,760 kg | |

Additional information

Note

Assembly time for completion: Mounting levelling bar or Ripperboard approx. 1.0 h.