


GreenMaster 800

8.0 metres hydraulic folding

For pasture maintenance, overseeding and seeding of new swards

Standard equipment:

- 2-rows NonStop-tines Ø12 mm, space between tines 75 mm
- Protection against loss of tines
- Hydraulic folding
- 4 Double gauge wheels with scraper for wet soils
- Headstock Cat. 2 and 3
- Road lighting kit (LED)
- Coupling kit STANDARD for trailed roller
- **U-stands for storage out of season**

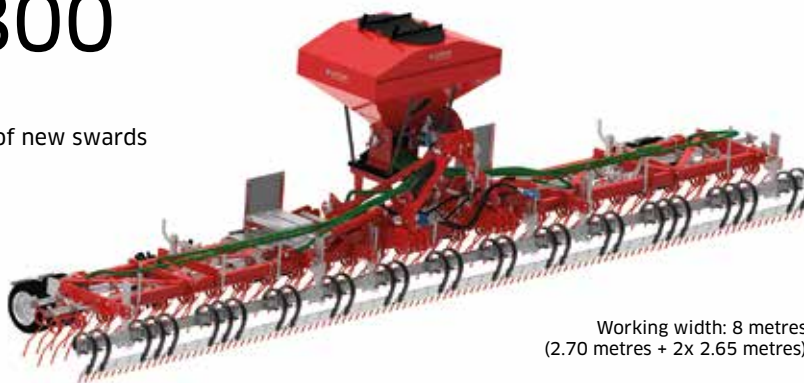

Working width: 8 metres
(2.70 metres + 2x 2.65 metres)

Standard machine

Type	Working width	Transport width	Transport height	Weight	Item Num.	Price excl. VAT
GreenMaster Harrow 800	8,00 m	3.00 m	4.15 m**	1,140 kg	4600 0190	

* for self-assembly ** Transport height with ground clearance of 0.25 metres

Options for harrow

Type	Working width	Note	Weight	Item Num.	Price excl. VAT
Levelling bar 800	8.00 m	For levelling, for self-assembly	300 kg	4600 1088	
Ripperboard 800 QUATTRO	8.00 m	For remediation, for self-assembly	390 kg	4600 1851	
Coupling kit PREMIUM		For trailed roller, mounted ex factory	20 kg	4600 1602	
Coupling kit PREMIUM, retrofit kit		For trailed roller, for self-assembly	20 kg	4600 1604	
Connecting tube for air brakes of the roller		for self-assembly	10 kg	7400 1011	

Pneumatic seeder

Type	Note	Weight	Item Num.	Price excl. VAT
410 litres 90° electrical fan	Descript. see page 20, mounted ex factory	90 kg	8202 2040-1	
410 litres 90° hydraulic fan	Descript. see page 20, mounted ex factory	100 kg	8202 2043-1	
410 litres 90° mechanic fan	Descript. see page 20, w/o drive shaft, mounted ex factory	110 kg	8202 2036-1	
660 litres hydraulic fan	Descript. see page 20, mounted ex factory	130 kg	8202 2041-1	
660 litres mechanical fan	Descript. see page 20, w/o drive shaft, mounted ex factory	140 kg	8202 2037-1	
Console GreenMaster 800 for pneumatic seeder 410 litres	For mounting the Pneumatic seeder 410 litres on the GreenMaster 800, mounted ex factory	110 kg	8202 2143	
Adapter plate for 660 litres	For mounting the Pneumatic seeder 660 litres on the console for the Pneumatic seeder 410 litres, mounted ex factory	10 kg	7400 2141	

Options for Pneumatic seeder

Further options for Pneumatic seeder see pages 20-21.

Type	Note	Item Num.	Price excl. VAT
Area meter (ha)	Day- and total counter battery-powered, for self-assembly	7006 0601	
Electrical seed rate setting	Seed rate adjustable from the tractor cab, for self-assembly	8202 2072	
Hydraulic lifting for ground wheel	For GreenMaster 600 + 750 + 800 with ground wheel, for self-assembly Required hydraulic connection: 1x single acting	78432 9027	
Drive shaft 1010 mm	To drive the mechanical fan	8202 2149	

Total GreenMaster 800

Beispiele	Weight	Price excl. VAT
GreenMaster Harrow 800 + Levelling bar 800 + Pneumatic seeder 410 litres electrical	1,705 kg	
GreenMaster Harrow 800 + Levelling bar 800 + Pneumatic seeder 410 litres hydraulic	1,715 kg	
GreenMaster Harrow 800 + Levelling bar 800 + Pneumatic seeder 410 litres mechanical	1,725 kg	
GreenMaster Harrow 800 + Levelling bar 800 + Pneumatic seeder 660 litres hydraulic	1,745 kg	
GreenMaster Harrow 800 + Ripperboard 800 QUATTRO + Pneumatic seeder 410 litres electrical	1,795 kg	
GreenMaster Harrow 800 + Ripperboard 800 QUATTRO + Pneumatic seeder 410 litres hydraulic	1,805 kg	
GreenMaster Harrow 800 + Ripperboard 800 QUATTRO + Pneumatic seeder 410 litres mechanical	1,815 kg	
GreenMaster Harrow 800 + Ripperboard 800 QUATTRO + Pneumatic seeder 660 litres hydraulic	1,835 kg	

Additional information

Note

Assembly time for completion: Mounting levelling bar or Ripperboard approx. 1.0 h.